


EARTHY ELEMENTS

Collection —









PEBBLE —

Natural Elegance



33.3 X 100 cm

SPECIFICATION

Pebble Style Name

Construction Multi-level loop (Colorshift)

Yarn Universal Nylon6 & Aquafil Nylon6

100% Solution Dyed Color System

Gauge 1/10 Stitches 8 per inch 24 oz/yd² Pile Weight

3.5 mm - 6.5 mm (±0.5 mm) Pile Height

Backing PVC with fiberglass Tile Size 33.3 cm x 100 cm Area of Use Heavy Commercial

Flammability Passes (ASTME648-10) Class |

Passes (GB 8624-2012) B1

Smoke Density Passes ASTM E 662 Less than 450

Static Propensity Passes AATCC-134≤3.5kV

Static Control Life-of-the carpet Static Protection

— INSTALLATION METHOD











PB01



PB02



PB03



PB04



PB05



PB06

PEBBLE -








PB05



PB06



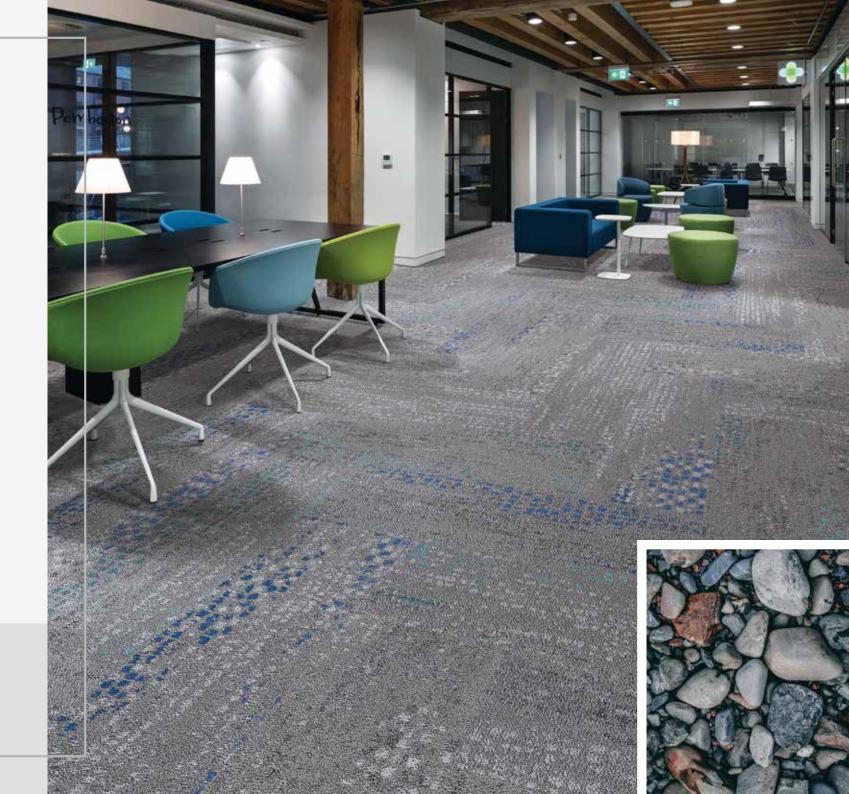


PEBBLE -





PEBBLE —







PEBBLE —







PEBBLE -














PB06




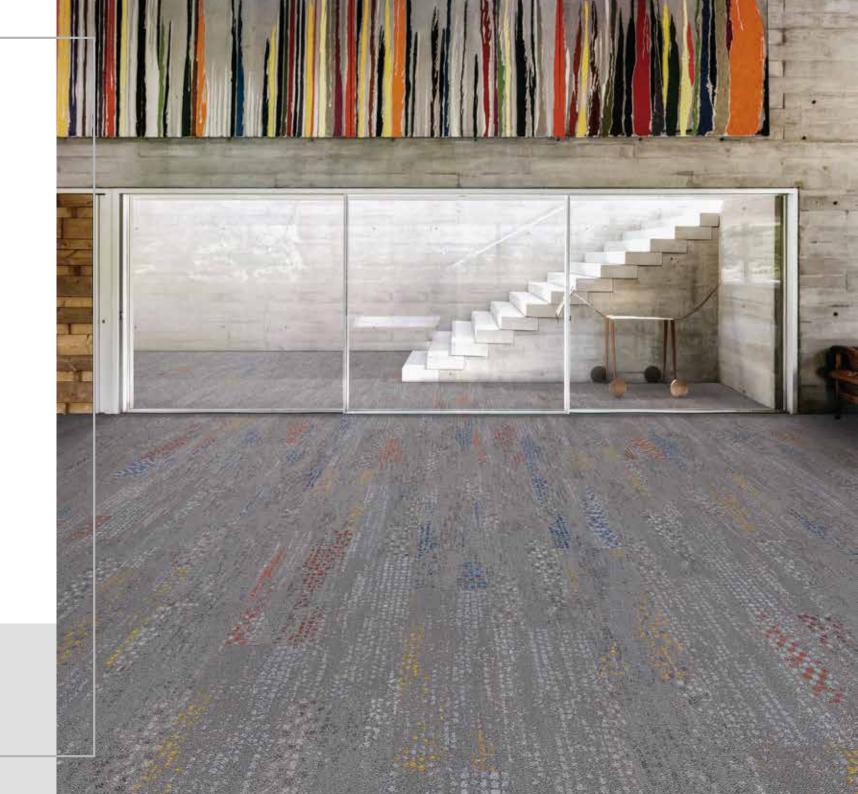

PEBBLE —





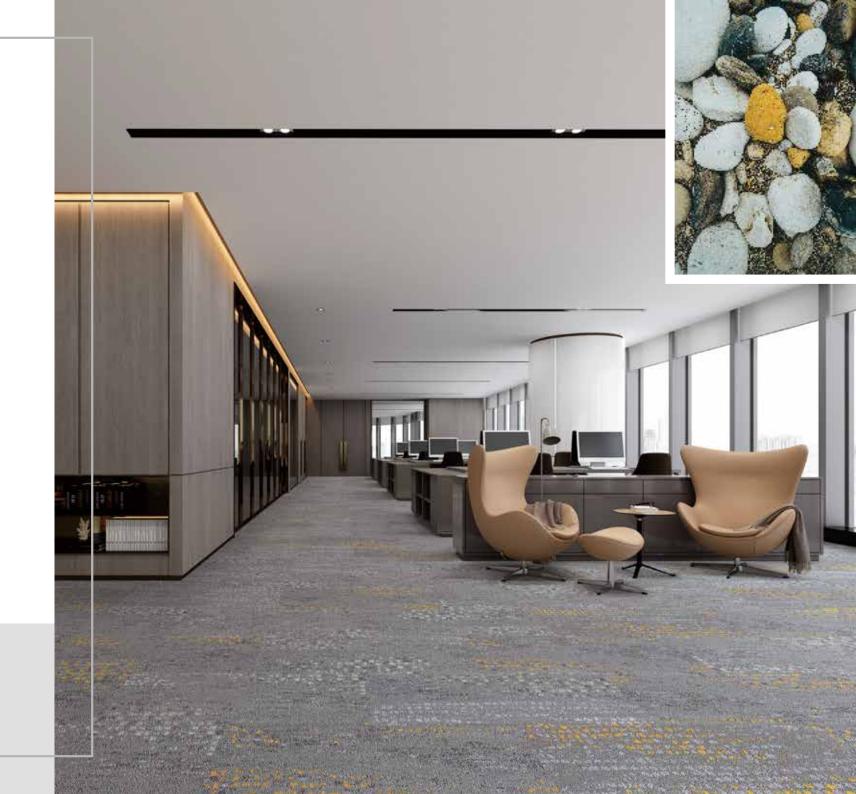

PEBBLE —









PB05



PB06



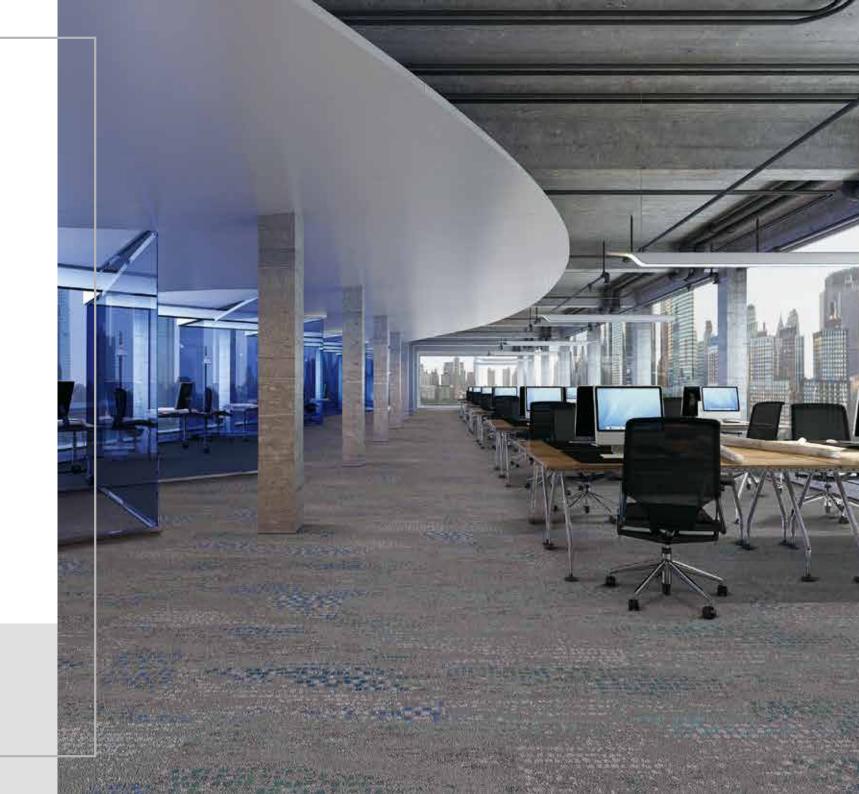

MAZE ——Navigate in style



33.3 X 100 cm

SPECIFICATION

Style Name : Maze

Construction : Multi-level loop (Colorshift)
Yarn : 100% Universal Nylon6
Color System : 100% Solution Dyed

 $\begin{array}{lll} \text{Gauge} & : & 1/10 \\ \text{Stitches} & : & 9 \text{ per inch} \\ \text{Pile Weight} & : & 23 \text{ oz/yd}^2 \end{array}$

Pile Height : 6.0 mm - 8.0 mm (±0.5 mm)

Backing : PVC with fiberglass
Tile Size : 33.3 cm x 100 cm
Area of Use : Heavy Commercial

Flammability : Passes (ASTME648-10) Class |

Passes (GB 8624-2012) B1

Smoke Density : Passes ASTM E 662 Less than 450

Static Propensity : Passes AATCC-134≤3.5kV

Static Control : Life-of-the carpet Static Protection

— INSTALLATION METHOD















MZ02








MZ04





MZ02

MZ03















MZ03









MZ03

MZ04





MISTRAL -Full of Character



25 X 100 cm

SPECIFICATION

Mistral Style Name

Construction Tip Shear (Colorshift) Yarn 100% Universal Nylon6 Color System 100% Solution Dyed

Gauge 1/10

Stitches 10 per inch Pile Weight 25 oz/yd²

5.0 mm - 8.0 mm (±0.5 mm) Pile Height

Backing PVC with fiberglass Tile Size 25 cm x 100 cm Area of Use Heavy Commercial

Flammability Passes (ASTME648-10) Class |

Passes (GB 8624-2012) B1

Smoke Density Passes ASTM E 662 Less than 450

Static Propensity Passes AATCC-134≤3.5kV

Life-of-the carpet Static Protection Static Control

— INSTALLATION METHOD













MS02



MS03



MS04



MS05



MS06



MS07



MS08

MISTRAL ¬







MS03












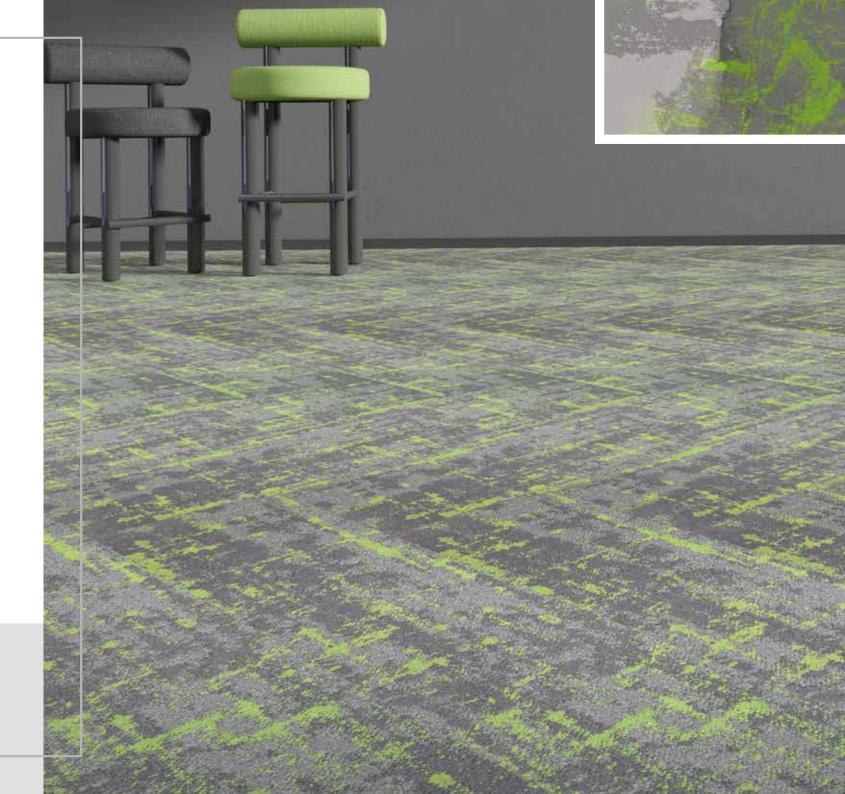

MISTRAL ¬



MS01








MS01

MS04



MS06









MS01

MS05









MS03






MS01 MS02 MS03 MS04





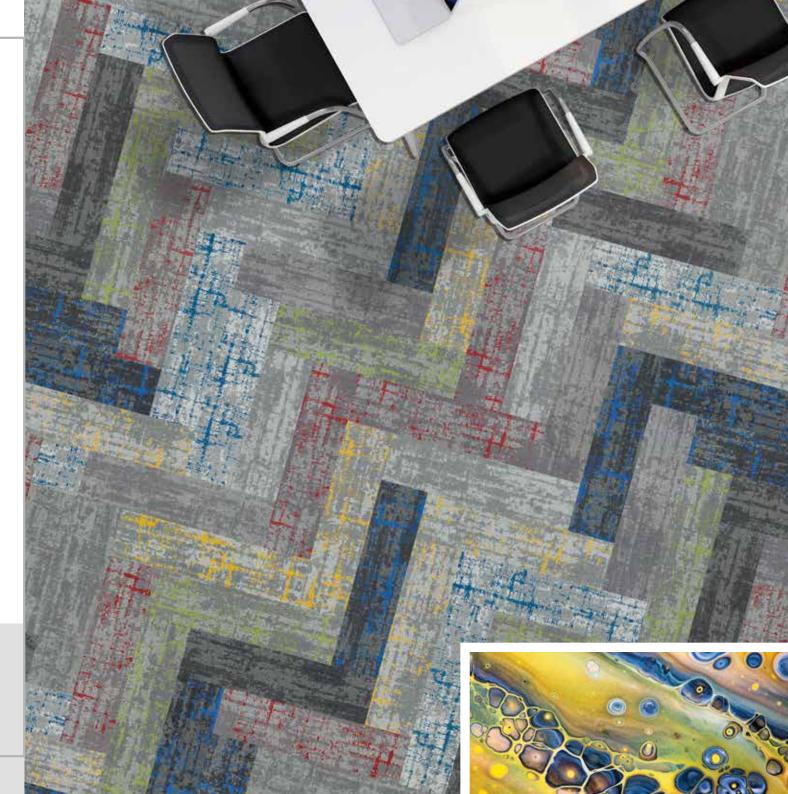

EMBRACE —

Epitome of Sophistication



SPECIFICATION

Style Name : Embrace

Construction : Multi-level loop (Colorshift)
Yarn : Universal Nylon 6.6 & Nylon6

Color System : 100% Solution Dyed

 $\begin{array}{lll} \text{Gauge} & : & 1/10 \\ \text{Stitches} & : & 8 \text{ per inch} \\ \text{Pile Weight} & : & 22 \text{ oz/yd}^2 \end{array}$

Pile Height : 4.0 mm - 8.5 mm (±0.5 mm)

Backing : PVC with fiberglass
Tile Size : 50 cm x 50 cm
Area of Use : Heavy Commercial

Flammability : Passes (ASTME648-10) Class |

Passes (GB 8624-2012) B1

Smoke Density : Passes ASTM E 662 Less than 450

Static Propensity : Passes AATCC-134≤3.5kV

Static Control : Life-of-the carpet Static Protection

— INSTALLATION METHOD









QUARTER TURN

ASHLAR BRICK DIRECTIONAL







EB02



EB03



EB04










EB06

EMBRACE -



EB05



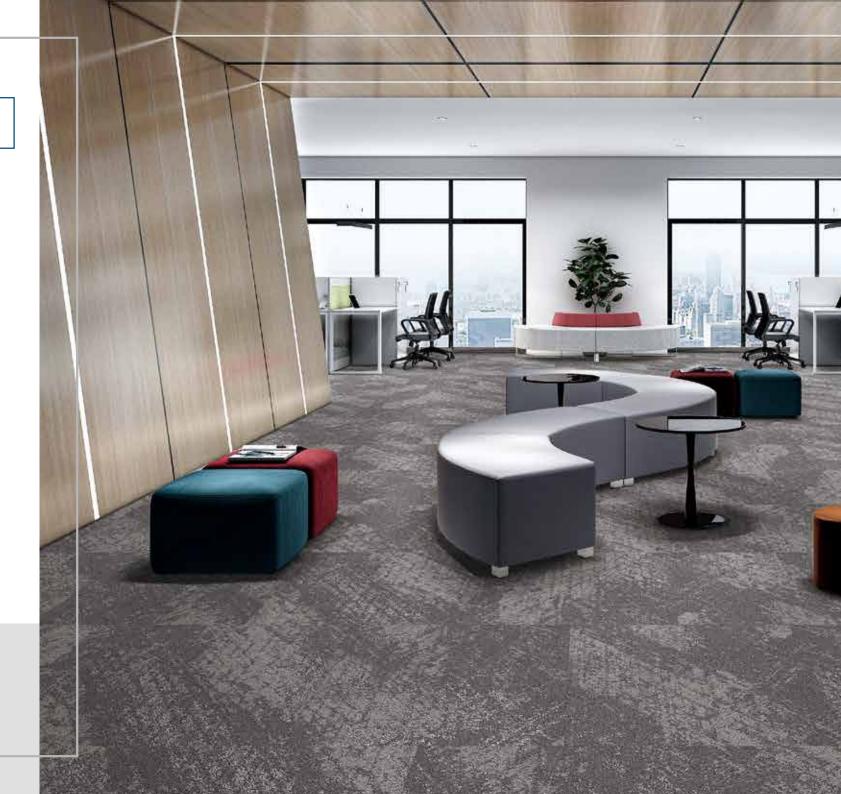


EMBRACE —

Epitome of Sophistication



EB02







EMBRACE —



EB03




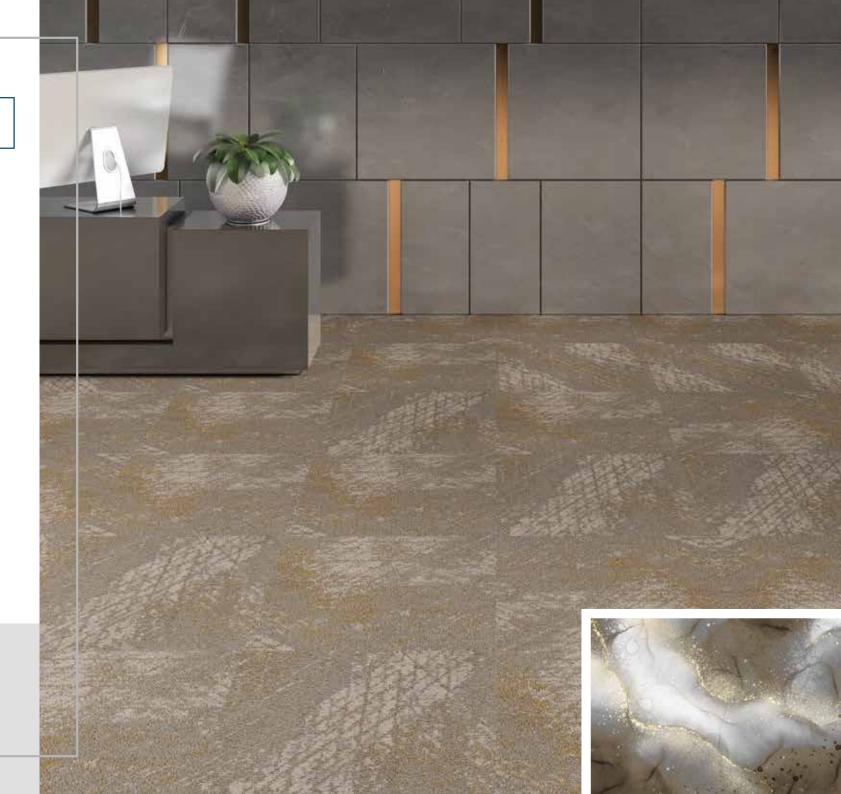

EMBRACE –



EB06






EMBRACE –



EB01






EMBRACE –



EB01



EB04





UMBRA — Exquisitely Aesthetic



SPECIFICATION

Style Name : Umbra

Construction : Multi-level loop (Colorshift)
Yarn : 100% Universal Nylon6
Color System : 100% Solution Dyed

 $\begin{array}{lll} \text{Gauge} & : & 1/10 \\ \text{Stitches} & : & 9 \text{ per inch} \\ \text{Pile Weight} & : & 25 \text{ oz/yd}^2 \end{array}$

Pile Height : 7.0 mm -8.0 mm (±0.5 mm)

Backing : PVC with fiberglass
Tile Size : 50 cm x 50 cm
Area of Use : Heavy Commercial

Flammability : Passes (ASTME648-10) Class |

Passes (GB 8624-2012) B1

Smoke Density : Passes ASTM E 662 Less than 450

Static Propensity : Passes AATCC-134≤3.5kV

Static Control : Life-of-the carpet Static Protection

— INSTALLATION METHOD



ASHLAR



BRICK






DIRECTIONAL

QUARTER TURN








UM02



UM03



UM04



UM05



UM06







UM08




UM02




UM05



UM06



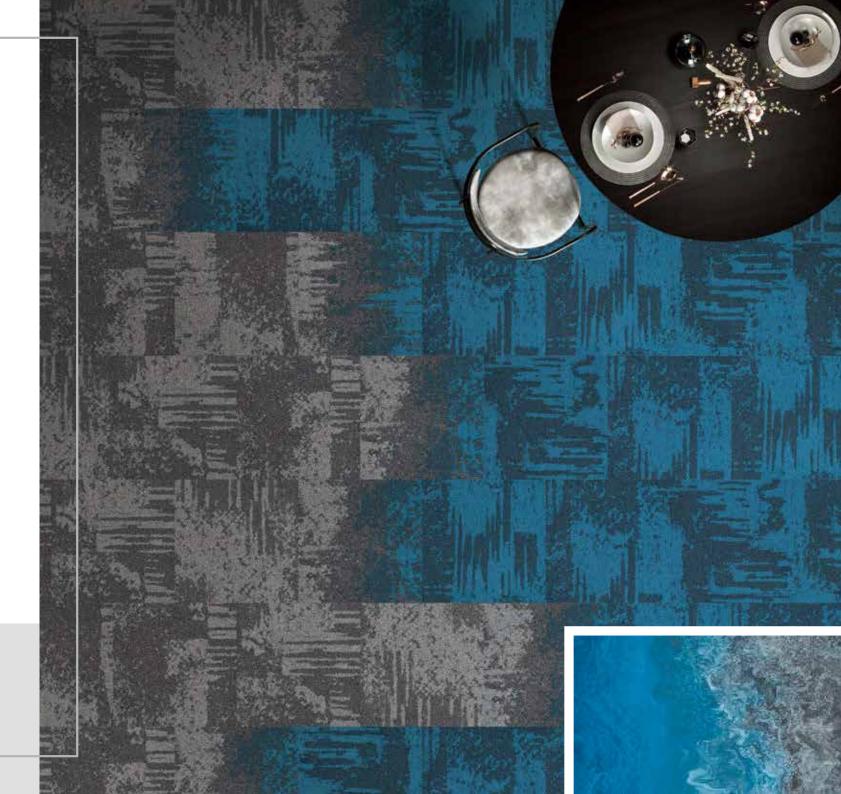


UMBRA



UM05



UM06









UM01



UM02




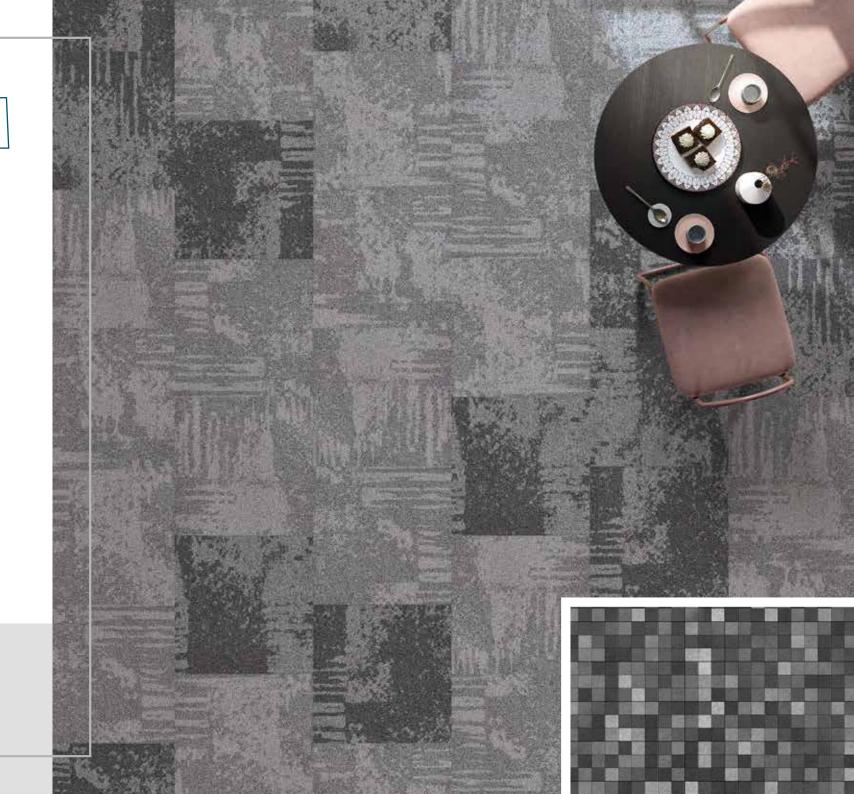

UMBRA



UM02








UM01




UM03



UM04








UM01




UM03



UM04



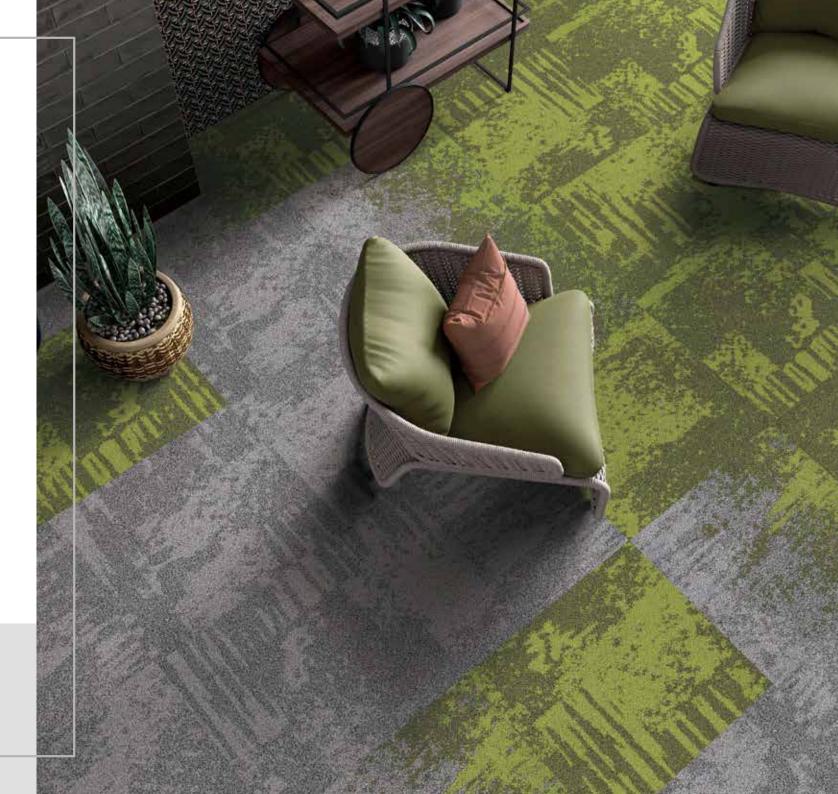




UM02




UM07



UM08



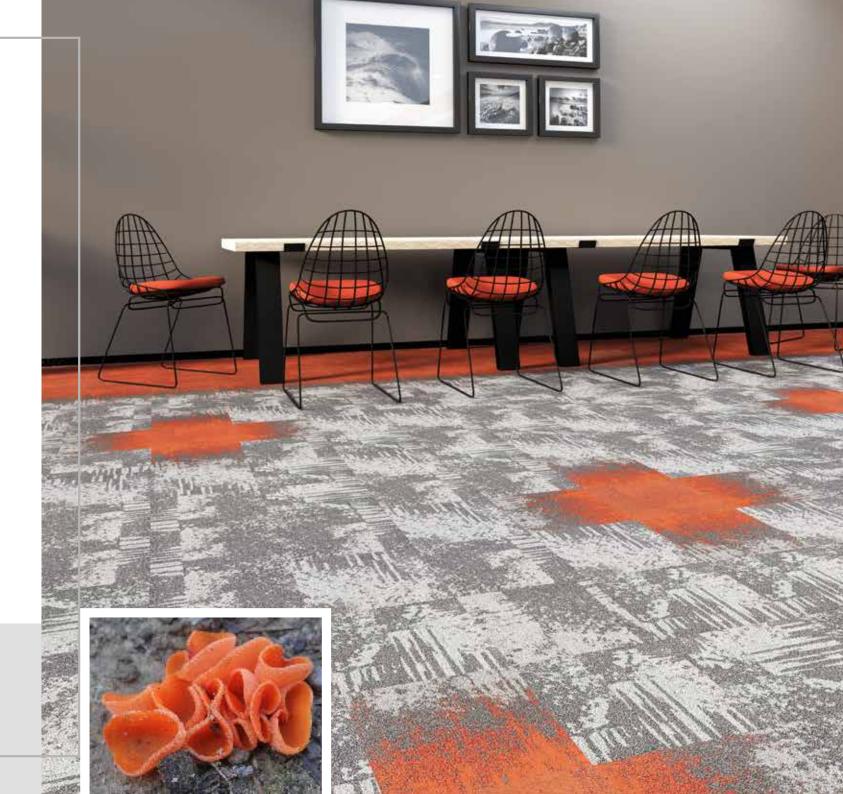




UM07



UM08







EURONICS INDUSTRIES PVT. LTD.

8010 930 930 | info@harrington.co.in | www.harrington.co.in